

Introducing Ventinox Rigid Stainless steel relining for masonry chimney. UL 1777, ULC S635M & ULC S640M.

The Ventinox family has been expanded to offer rigid liner for use in existing or new masonry chimneys.

Rigid stainless steel liner is used to mend and improve masonry chimney liners that vent Category solid, liquid or gas-fuel (coal, wood, oil, etc) fired appliances.


Controlled-combustion stoves are designed accordingly to highly efficient heat transfer and combustion technologies. Their rate of performance increases when they are installed with a chimney of suitable diameter.

Features and Benefits

- 304 type stainless steel.
- Available in 5" to 8" diameters.
- Delivers resistance to corrosion.
- 1/2" clearance to masonry chimney.
- Double-lock seam.
- Unique twist-lock system.
- Ideal for use when the clay liner of an existing chimney is damaged.
- Improves the chimney's draft.
- Can be used as a substitute for the clay liner in a new masonry chimney.

Insulation

- With TherMix or ProFoil insulation 0" clearance for solid fuels.
- Use AluFoil Tape to seal seams of ProFoil insulation.
- Use ProMesh to protect the ProFoil during installation.

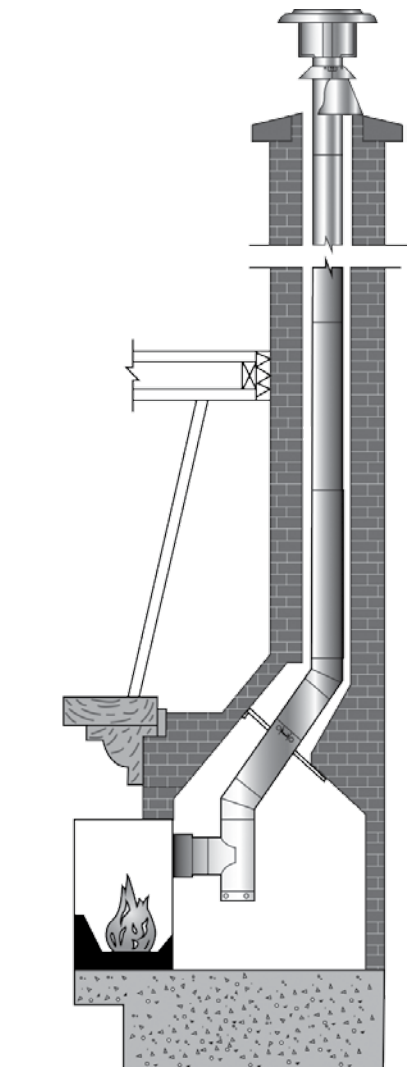

DuraVent
Member of & M&G Group

Ventinox® Rigid

Description	5" Stock #	6" Stock #	7" Stock #	8" Stock #
6" Length	5VRT-06	6VRT-06	7VRT-06	8VRT-06
12" Length	5VRT-12	6VRT-12	7VRT-12	8VRT-12
24" Length	5VRT-24	6VRT-24	7VRT-24	8VRT-24
36" Length	5VRT-36	6VRT-36	7VRT-36	8VRT-36
48" Length	5VRT-48	6VRT-48	7VRT-48	8VRT-48
Adjustable Length (7 - 11)	5VRT-12A	6VRT-12A	7VRT-12A	8VRT-12A
Split Base Tee	5VRT-T	6VRT-T	7VRT-T	8VRT-T
Twist Lock Tee Cap	5VRT-TC	6VRT-TC	7VRT-TC	8VRT-TC
30° Elbow	5VRT-E30	6VRT-E30	7VRT-E30	8VRT-E30
45° Elbow	5VRT-E45	6VRT-E45	7VRT-E45	8VRT-E45
90° Elbow	5VRT-E90	6VRT-E90	7VRT-E90	8VRT-E90
Flashing	5VRT-FF	6VRT-FF	7VRT-FF	8VRT-FF
Collar for (LST) TU	---	6VRT-SC	7VRT-SC	8VRT-SC
Flashing Stainless	5VRT-FF-SS	6VRT-FF-SS	7VRT-FF-SS	8VRT-FF-SS
Support Assembly	5VRT-SAO	6VRT-SAO	7VRT-SAO	8VRT-SAO
Interior Support	5VRT-SAI	6VRT-SAI	7VRT-SAI	8VRT-SAI
Adapter Flex Pipe (Male)	5VRT-ADFM	6VRT-ADFM	7VRT-ADFM	8VRT-ADFM
Adapter Flex Pipe (Female)	5VRT-ADFF	6VRT-ADFF	7VRT-ADFF	8VRT-ADFF
Stainless Flexible Length (60")	5VRT-FLEX	6VRT-FLEX	7VRT-FLEX	8VRT-FLEX
Masonry Adapter	5VRT-MTSC	6VRT-MTSC	7VRT-MTSC	8VRT-MTSC
Rain Cap	5VRT-RC	6VRT-RC	7VRT-RC	8VRT-RC
Adjustable Wall Thimble 6" - 12"	---	6VRT-WTI	7VRT-WTI	8VRT-WTI
Increaser Length (5" - 6")	5VRT-X6	---	---	---
Increaser Length (6" - 7")	---	6VRT-X7	---	---
Increaser Length (7" - 8")	---	---	7VRT-X8	---
Reducer Length (6" - 5")	---	6VRT-X5	---	---
Reducer Length (7" - 6")	---	---	7VRT-X6	---
Reducer Length (8" - 7")	---	---	---	8VRT-X7

For Pricing Consult the 2015 Pricebook



DuraVent
Member of & M&G Group