

FASNSEAL®


VENTING FOR CONDENSING APPLIANCES



FasNSeal Flex: the only flexible vent system UL-1738 approved, is built with a sure-seal locking seam for superior strength and flexibility. A smooth inner-wall means no output reduction allowing for full efficiency and easy cleaning. 3" to 12" diameters. Fully interchangeable with FasNSeal rigid vent system.

FasNSeal rigid single and double-wall: vent lengths with diameters up to 24" to handle commercial applications. The patented built-in mechanical locking band and triple-lipped directional gaskets reduce installation time. Zero clearance to combustibles.

FasNSeal is UL Listed to ULC-S636 and UL-1738. FasNSeal Flex is UL Listed to UL-1738 and UL-1777. Find out more at www.duravent.com

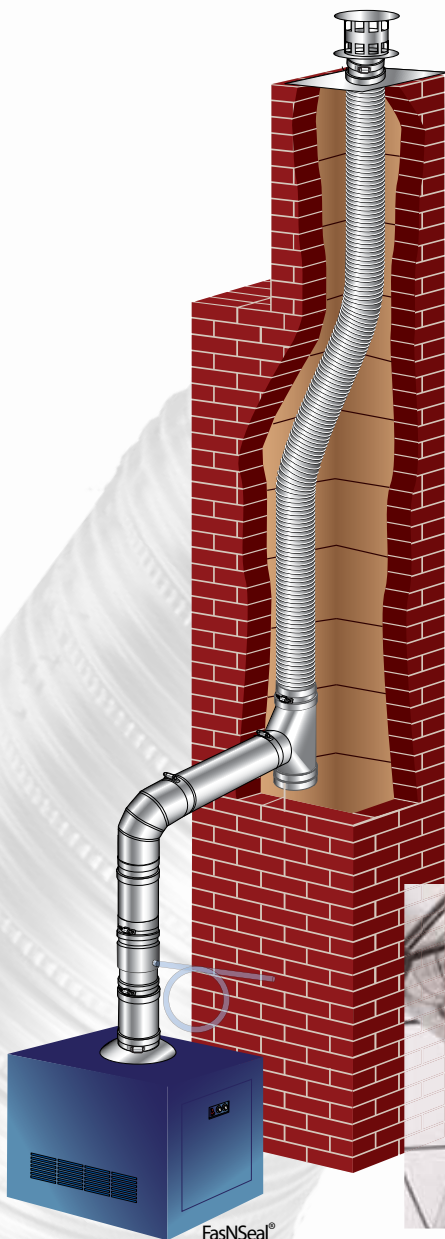

DuraVent
Member of M&G Group